

MASKING



SRC Series (Silicone Rubber Caps)



Silicone Rubber Caps are ideal for protecting and masking parts undergoing painting, plating, powder coating, anodizing, abrasive chemical processing, or exposure to high temperatures up to 600°F (316°C). Molded from a specially formulated grade of silicone rubber, these caps contain no coloring agents which could bleed under high temperatures. SRC Series Silicone Rubber Caps are especially suited for covering studs, tube ends, and other projections.




Material: Silicone Rubber **Color*:** Natural




Caplug No.	Dimensions							Packaging	
	To Fit Stud Size	A		B		C		Carton Quantity	Mini Pak Quantity
		+/- .020 In	+/- .51 mm	+/- .010 In	+/- .25 mm	+/- .020 In	+/- .51 mm		
SRC-040-12	-	.040	1.02	.05	1.27	.75	19.05	1000	200
SRC-070-16	-	.070	1.78	.06	1.52	1.00	25.40	1000	200
SRC-080-12	-	.080	2.03	.06	1.52	.75	19.05	1000	200
SRC-093-12	4	.093	2.36	.06	1.52	.75	19.05	1000	200
SRC-100-16	-	.100	2.54	.06	1.52	1.00	25.40	1000	200
SRC-109-12	5	.109	2.77	.06	1.52	.75	19.05	1000	200
SRC-125-8	6	.125	3.18	.06	1.52	.50	12.70	1000	200
SRC-125-16	6	.125	3.18	.06	1.52	1.00	25.40	1000	200
SRC-137-16	-	.137	3.48	.06	1.52	1.00	25.40	1000	200
SRC-140-16	-	.140	3.56	.06	1.52	1.00	25.40	1000	n/a
SRC-148-16	-	.148	3.76	.06	1.52	1.00	25.40	1000	200
SRC-156-16	-	.156	3.96	.06	1.52	1.00	25.40	1000	100
SRC-172-16	-	.172	4.37	.06	1.52	1.00	25.40	1000	100
SRC-180-16	-	.180	4.57	.06	1.52	1.00	25.40	1000	200
SRC-187-16	12	.187	4.75	.06	1.52	1.00	25.40	1000	100
SRC-218-16	-	.218	5.54	.06	1.52	1.00	25.40	1000	100
SRC-223-16	-	.223	5.66	.06	1.52	1.00	25.40	1000	200
SRC-234-16	1/4	.234	5.94	.06	1.52	1.00	25.40	1000	100
SRC-250-16	1/4	.250	6.35	.06	1.52	1.00	25.40	1000	100
SRC-281-16	-	.281	7.14	.06	1.52	1.00	25.40	1000	100
SRC-295-24	-	.295	7.49	.06	1.52	1.50	38.10	1000	200
SRC-312-16	5/16	.312	7.92	.06	1.52	1.00	25.40	1000	100
SRC-343-16	-	.340	10.36	.06	1.52	1.00	25.40	1000	100
SRC-355-24	-	.355	9.02	.06	1.52	1.50	38.10	1000	200
SRC-375-16	3/8	.375	9.53	.06	1.52	1.00	25.40	1000	100
SRC-406-16	-	.406	10.31	.06	1.52	1.00	25.40	200	50
SRC-437-16	-	.437	11.10	.06	1.52	1.00	25.40	1000	40
SRC-480-24	-	.480	12.19	.06	1.52	1.50	38.10	200	50
SRC-500-24	-	.500	12.70	.06	1.52	1.50	38.10	200	50
SRC-535-24	-	.535	13.59	.06	1.52	1.50	38.10	200	40
SRC-562-24	-	.562	14.27	.06	1.52	1.50	38.10	200	40
SRC-625-24	-	.625	15.88	.06	1.52	1.50	38.10	200	50
SRC-687-24	-	.687	17.45	.06	1.52	1.50	38.10	200	50
SRC-730-24	-	.730	18.54	.06	1.52	1.50	38.10	200	40
SRC-750-24	-	.750	19.05	.06	1.52	1.50	38.10	200	50
SRC-812-24	-	.812	20.62	.06	1.52	1.50	38.10	200	40
SRC-875-24	-	.875	22.23	.06	1.52	1.50	38.10	200	40
SRC-937-24	-	.937	23.80	.06	1.52	1.50	38.10	200	40
SRC-970-24	-	.970	24.64	.06	1.52	1.50	38.10	100	20
SRC-1000-24	-	1.000	25.40	.06	1.52	1.50	38.10	200	40
SRC-1062-24	-	1.062	26.97	.06	1.52	1.50	38.10	100	20
SRC-1125-24	-	1.125	28.58	.06	1.52	1.50	38.10	100	20
SRC-1187-24	-	1.187	30.15	.06	1.52	1.50	38.10	100	20
SRC-1250-24	-	1.250	31.75	.06	1.52	1.50	38.10	100	20
SRC-1375-24	-	1.375	34.93	.06	1.52	1.50	38.10	100	20
SRC-1500-28	-	1.500	38.10	.06	1.52	1.75	44.45	100	20
SRC-1625-32	-	1.625	41.28	.06	1.52	2.00	50.80	100	20
SRC-1750-24	-	1.750	44.45	.06	1.52	1.50	38.10	100	20
SRC-1875-32	-	1.875	47.63	.06	1.52	2.00	50.80	100	20
SRC-2000-32	-	2.000	50.80	.06	1.52	2.00	50.80	100	20

TS Series (Silicone / Tapered Caps & Plugs)



Caplugs is excited to introduce a new line of tapered caps / plugs in flexible and durable silicone material. The TS series offers all the versatility of traditional tapers with the added resilience of silicone. Ideal for use in masking applications that require temperature and corrosion resistance. Available in two durometers: 70 Red and 45 Natural. TS series 70 Red has a more structured, rigid feel, while the 45 Natural offers extreme flexibility.

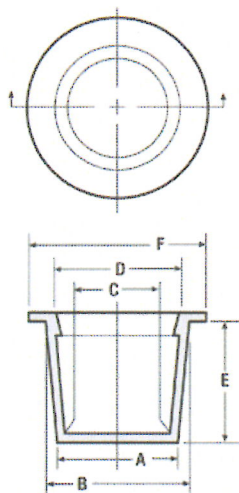

Caplug No	Dim A	Dim B	Dim C	Dim D	Dim E	Dim F
TS-00	0.116	0.182	0.053	0.120	0.38	0.33
TS-0	0.173	0.240	0.111	0.177	0.38	0.40
TS-1	0.240	0.295	0.174	0.240	0.38	0.46
TS-2	0.299	0.365	0.235	0.302	0.38	0.52
TS-3	0.361	0.418	0.298	0.365	0.38	0.58
TS-4	0.419	0.485	0.356	0.422	0.38	0.65
TS-5	0.471	0.536	0.409	0.485	0.44	0.71
TS-6	0.532	0.608	0.468	0.545	0.44	0.77
TS-7	0.580	0.667	0.518	0.605	0.50	0.83
TS-8	0.640	0.727	0.578	0.664	0.50	0.90
TS-9	0.690	0.788	0.628	0.726	0.56	0.96
TS-10	0.750	0.848	0.687	0.785	0.56	1.02
TS-11	0.802	0.911	0.740	0.849	0.63	1.08
TS-12	0.866	0.975	0.803	0.912	0.63	1.15
TS-13	0.964	1.090	0.901	1.027	0.75	1.27
TS-14	1.094	1.215	1.031	1.152	0.75	1.43
TS-15	1.224	1.355	1.161	1.292	0.75	1.52
TS-16	1.312	1.465	1.249	1.402	0.88	1.65
TS-17	1.447	1.600	1.384	1.537	0.88	1.77
TS-18	1.560	1.682	1.498	1.620	0.75	1.90
TS-19	1.750	1.880	1.688	1.818	0.75	2.02
TS-20	1.780	1.950	1.718	1.888	1.00	2.15
TS-21	1.900	2.076	1.837	2.013	1.00	2.27

MASKING


HVC Series (Flexible Round Caps)



Series HVC temperature-resistant caps are extremely flexible closures which are ideal for use as thread protectors, dust covers, moisture seals and more. Flex500 is an innovative material specially formulated to withstand temperatures 500°F and beyond. HVC caps are ideal for masking applications including powder coating, e-coating, painting and more.



Material: Flex500 Color*: Black Standard Option Color: Yellow

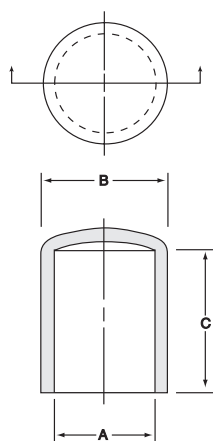

Caplug No.	Dimensions						Packaging		
	A		B		C		Carton Quantity	Mini Pak [†] Quantity	Micro Pak [‡] Quantity
	In	mm	In	mm	In	mm			
HVC-054-10	.054	1.37	.09	2.29	.625	15.88	5000	n/a	n/a
HVC-062-10	.062	1.57	.12	3.05	.625	15.88	5000	1000	100
HVC-072-10	.072	1.83	.13	3.35	.625	15.88	5000	n/a	n/a
HVC-080-10	.080	2.03	.14	3.56	.625	15.88	5000	1000	100
HVC-093-12	.093	2.36	.15	3.81	.750	19.05	5000	1000	100
HVC-109-12	.109	2.77	.18	4.57	.750	19.05	5000	1000	100
HVC-125-8	.125	3.18	.20	5.08	.500	12.70	5000	n/a	n/a
HVC-125-16	.125	3.18	.20	5.08	1.000	25.40	5000	1000	100
HVC-140-8	.140	3.56	.21	5.33	.500	12.70	5000	n/a	n/a
HVC-140-16	.140	3.56	.21	5.33	1.000	25.40	5000	1000	100
HVC-148-8	.148	3.76	.24	6.30	.500	12.70	5000	n/a	n/a
HVC-148-16	.148	3.76	.24	6.30	1.000	25.40	5000	n/a	n/a
HVC-156-8	.156	3.96	.24	6.10	.500	12.70	5000	n/a	n/a
HVC-156-16	.156	3.96	.24	6.10	1.000	25.40	5000	1000	100
HVC-172-8	.172	4.37	.25	6.35	.500	12.70	5000	n/a	n/a
HVC-172-16	.172	4.37	.25	6.35	1.000	25.40	5000	1000	100
HVC-180-8	.180	4.57	.26	6.60	.500	12.70	5000	n/a	n/a
HVC-180-16	.180	4.57	.26	6.60	1.000	25.40	5000	n/a	n/a
HVC-187-8	.187	4.75	.27	6.86	.500	12.70	5000	n/a	n/a
HVC-187-16	.187	4.75	.27	6.86	1.000	25.40	5000	1000	100
HVC-187-24	.187	4.75	.27	6.86	1.500	38.10	4000	n/a	n/a
HVC-203-8	.203	5.16	.29	7.37	.500	12.70	5000	n/a	n/a
HVC-203-16	.203	5.16	.29	7.37	1.000	25.40	5000	1000	100
HVC-218-8	.218	5.54	.31	7.87	.500	12.70	5000	n/a	n/a
HVC-218-16	.218	5.54	.31	7.87	1.000	25.40	5000	1000	100
HVC-224-8	.224	5.69	.31	7.87	.500	12.70	5000	n/a	n/a
HVC-224-16	.224	5.69	.31	7.87	1.000	25.40	4000	n/a	n/a
HVC-234-8	.234	5.94	.32	8.13	.500	12.70	5000	n/a	n/a
HVC-234-16	.234	5.94	.32	8.13	1.000	25.40	5000	1000	100
HVC-250-8	.250	6.35	.35	8.89	.500	12.70	5000	n/a	n/a
HVC-250-16	.250	6.35	.35	8.89	1.000	25.40	5000	1000	100
HVC-281-8	.281	7.14	.38	9.65	.500	12.70	5000	n/a	n/a
HVC-281-16	.281	7.14	.38	9.65	1.000	25.40	5000	1000	100
HVC-290-8	.290	7.37	.40	10.16	.500	12.70	5000	n/a	n/a
HVC-290-16	.290	7.37	.40	10.16	1.000	25.40	5000	n/a	n/a
HVC-304-8	.304	7.72	.41	10.41	.500	12.70	5000	n/a	n/a
HVC-304-16	.304	7.72	.41	10.41	1.000	25.40	5000	n/a	n/a
HVC-312-8	.312	7.93	.42	10.67	.500	12.70	5000	n/a	n/a
HVC-312-16	.312	7.93	.42	10.67	1.000	25.40	5000	1000	100
HVC-312-24	.312	7.93	.43	10.92	1.500	38.10	2500	n/a	n/a
HVC-343-8	.343	8.71	.45	11.43	.500	12.70	5000	n/a	n/a
HVC-343-16	.343	8.71	.45	11.43	1.000	25.40	2500	500	50
HVC-375-8	.375	9.53	.50	12.70	.500	12.70	5000	n/a	n/a
HVC-375-16	.375	9.53	.50	12.70	1.000	25.40	2500	500	50
HVC-406-8	.406	10.31	.53	13.46	.500	12.70	5000	n/a	n/a
HVC-406-16	.406	10.31	.53	13.46	1.000	25.40	2500	500	50
HVC-437-8	.437	11.10	.56	14.22	.500	12.70	5000	n/a	n/a
HVC-437-16	.437	11.10	.56	14.22	1.000	25.40	2500	500	50
HVC-460-8	.460	11.68	.58	14.73	.500	12.70	5000	n/a	n/a
HVC-460-16	.460	11.68	.58	14.73	1.000	25.40	2500	n/a	n/a
HVC-467-8	.467	11.86	.58	14.73	.500	12.70	5000	n/a	n/a
HVC-467-16	.467	11.86	.58	14.73	1.000	25.40	2500	n/a	n/a
HVC-490-8	.490	12.45	.61	15.49	.500	12.70	5000	n/a	n/a
HVC-490-16	.490	12.45	.61	15.49	1.000	25.40	3000	n/a	n/a
HVC-500-8	.500	12.70	.62	15.75	.500	12.70	5000	n/a	n/a
HVC-500-16	.500	12.70	.62	15.75	1.000	25.40	2500	500	50
HVC-531-8	.531	13.49	.65	16.51	.500	12.70	5000	n/a	n/a
HVC-531-16	.531	13.49	.65	16.51	1.000	25.40	2500	n/a	n/a
HVC-562-8	.562	14.28	.69	17.53	.500	12.70	2500	n/a	n/a
HVC-562-16	.562	14.28	.69	17.53	1.000	25.40	2000	n/a	n/a
HVC-600-8	.600	15.24	.73	18.54	.500	12.70	3000	n/a	n/a
HVC-600-16	.600	15.24	.73	18.54	1.000	25.40	2000	n/a	n/a

† Mini and Micro Paks available in standard color.

‡ Minimum order for Micro Paks is 2.

HVC Series (Flexible Round Caps) cont.

Caplug No.	Dimensions						Packaging		
	A		B		C		Carton Quantity	Mini Pak† Quantity	Micro Pak‡ Quantity
	In	mm	In	mm	In	mm			
HVC-625-8	.625	15.88	.76	19.30	.500	12.70	2500	n/a	n/a
HVC-625-16	.625	15.88	.76	19.30	1.000	25.40	2000	400	50
HVC-625-24	.625	15.88	.77	19.56	1.500	38.10	1500	n/a	n/a
HVC-640-8	.640	16.26	.77	19.56	.500	12.70	4000	n/a	n/a
HVC-640-16	.640	16.26	.77	19.56	1.000	25.40	2000	n/a	n/a
HVC-665-8	.665	16.89	.80	20.32	.500	12.70	4000	n/a	n/a
HVC-665-16	.665	16.89	.80	20.32	1.000	25.40	2000	n/a	n/a
HVC-687-8	.687	17.45	.81	20.57	.500	12.70	2500	n/a	n/a
HVC-687-16	.687	17.45	.81	20.57	1.000	25.40	1000	n/a	n/a
HVC-690-8	.690	17.53	.82	20.83	.500	12.70	2500	n/a	n/a
HVC-690-16	.690	17.53	.82	20.83	1.000	25.40	1000	n/a	n/a
HVC-725-8	.725	18.42	.86	21.84	.500	12.70	2500	n/a	n/a
HVC-725-16	.725	18.42	.86	21.84	1.000	25.40	1000	n/a	n/a
HVC-750-8	.750	19.05	.88	22.35	.500	12.70	2500	n/a	n/a
HVC-750-16	.750	19.05	.88	22.35	1.000	25.40	1000	200	25
HVC-812-8	.812	20.63	.94	23.88	.500	12.70	2500	n/a	n/a
HVC-812-16	.812	20.63	.94	23.88	1.000	25.40	1000	n/a	n/a
HVC-812-24	.812	20.63	.95	24.13	1.500	38.10	1000	n/a	n/a
HVC-843-8	.843	21.41	.98	24.89	.500	12.70	2500	n/a	n/a
HVC-843-16	.843	21.41	.98	24.89	1.000	25.40	1000	n/a	n/a
HVC-870-8	.870	22.10	1.01	25.65	.500	12.70	1000	n/a	n/a
HVC-870-16	.870	22.10	1.01	25.65	1.000	25.40	1000	n/a	n/a
HVC-875-8	.875	22.23	1.02	25.91	.500	12.70	2500	n/a	n/a
HVC-875-16	.875	22.23	1.02	25.91	1.000	25.40	1000	200	25
HVC-875-24	.875	22.23	1.02	25.91	1.500	38.10	1000	n/a	n/a
HVC-937-8	.937	23.80	1.08	27.43	.500	12.70	2000	n/a	n/a
HVC-937-16	.937	23.80	1.08	27.43	1.000	25.40	1000	n/a	n/a
HVC-985-8	.985	25.02	1.13	28.70	.500	12.70	2000	n/a	n/a
HVC-985-16	.985	25.02	1.13	28.70	1.000	25.40	1000	n/a	n/a
HVC-1000-8	1.000	25.40	1.14	28.96	.500	12.70	1000	n/a	n/a
HVC-1000-16	1.000	25.40	1.14	28.96	1.000	25.40	1000	200	25
HVC-1000-24	1.000	25.40	1.14	28.96	1.500	38.10	1000	n/a	n/a
HVC-1062-16	1.062	26.97	1.20	30.48	1.000	25.40	1200	n/a	n/a
HVC-1090-16	1.090	27.69	1.22	30.99	1.000	25.40	1200	n/a	n/a
HVC-1125-16	1.125	28.57	1.27	32.26	1.000	25.40	500	n/a	n/a
HVC-1187-16	1.187	30.14	1.33	33.78	1.000	25.40	500	n/a	n/a
HVC-1250-16	1.250	31.75	1.39	35.31	1.000	25.40	500	n/a	n/a
HVC-1250-24	1.250	31.75	1.39	35.31	1.500	38.10	500	n/a	n/a
HVC-1312-16	1.312	33.32	1.45	36.83	1.000	25.40	1000	n/a	n/a
HVC-1312-24	1.312	33.32	1.45	36.83	1.500	38.10	600	n/a	n/a
HVC-1375-16	1.375	34.92	1.52	38.61	1.000	25.40	500	n/a	n/a
HVC-1375-24	1.375	34.92	1.52	38.61	1.500	38.10	400	n/a	n/a
HVC-1437-16	1.437	36.50	1.58	40.06	1.000	25.40	750	n/a	n/a
HVC-1500-16	1.500	38.10	1.64	41.66	1.000	25.40	500	n/a	n/a
HVC-1500-24	1.500	38.10	1.64	41.66	1.500	38.10	300	n/a	n/a
HVC-1593-16	1.593	40.46	1.72	43.76	1.000	25.40	500	n/a	n/a
HVC-1625-16	1.625	41.27	1.77	44.96	1.000	25.40	500	n/a	n/a
HVC-1687-16	1.687	42.84	1.83	46.48	1.000	25.40	500	n/a	n/a
HVC-1750-16	1.750	44.45	1.89	48.01	1.000	25.40	500	n/a	n/a
HVC-1812-16	1.812	46.02	1.95	49.58	1.000	25.40	1000	n/a	n/a
HVC-1875-16	1.875	47.62	2.02	51.31	1.000	25.40	250	n/a	n/a
HVC-1937-16	1.937	49.20	2.07	52.76	1.000	25.40	600	n/a	n/a
HVC-2000-16	2.000	50.80	2.14	54.36	1.000	25.40	250	n/a	n/a
HVC-2000-24	2.000	50.80	2.14	54.36	1.500	38.10	300	n/a	n/a
HVC-2125-16	2.125	53.98	2.27	57.79	1.000	25.40	500	n/a	n/a
HVC-2156-16	2.156	54.76	2.30	58.57	1.000	25.40	500	n/a	n/a
HVC-2250-16	2.250	57.15	2.40	60.96	1.000	25.40	500	n/a	n/a
HVC-2250-24	2.250	57.15	2.40	60.96	1.500	38.10	300	n/a	n/a
HVC-2375-16	2.375	59.56	2.52	64.14	1.000	25.40	200	n/a	n/a
HVC-2375-24	2.375	59.56	2.52	64.14	1.500	38.10	250	n/a	n/a
HVC-2460-16	2.460	62.48	2.61	66.29	1.000	25.40	250	n/a	n/a
HVC-2500-16	2.500	63.50	2.65	67.31	1.000	25.40	400	n/a	n/a
HVC-2500-24	2.500	63.50	2.65	67.31	1.500	38.10	250	n/a	n/a
HVC-2625-16	2.625	66.67	2.77	70.49	1.000	25.40	400	n/a	n/a
HVC-2625-24	2.625	66.67	2.77	70.49	1.500	38.10	200	n/a	n/a
HVC-2687-16	2.687	68.25	2.84	72.31	1.000	25.40	400	n/a	n/a
HVC-2750-16	2.750	69.85	2.91	73.91	1.000	25.40	300	n/a	n/a
HVC-2750-24	2.750	69.85	2.91	73.91	1.500	38.10	200	n/a	n/a
HVC-2875-16	2.875	73.03	3.03	77.09	1.000	25.40	250	n/a	n/a
HVC-3000-16	3.000	76.20	3.16	80.26	1.000	25.40	250	n/a	n/a
HVC-3000-24	3.000	76.20	3.16	80.26	1.500	38.10	250	n/a	n/a


HVC Series continues on next page

† Mini and Micro Paks available in standard color.

‡ Minimum order for Micro Paks is 2.

MASKING

HVC Series (Flexible Round Caps) cont.

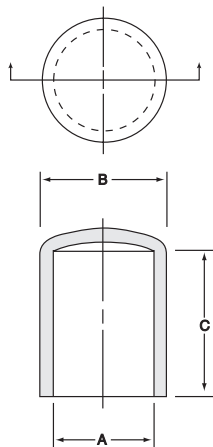

Caplug No.	Dimensions						Packaging		
	A		B		C		Carton Quantity	Mini Pak† Quantity	Micro Pak‡ Quantity
	In	mm	In	mm	In	mm			
HVC-3125-16	3.125	79.37	3.285	83.44	1.000	25.40	250	n/a	n/a
HVC-3125-24	3.125	79.37	3.285	83.44	1.500	38.10	300	n/a	n/a
HVC-3250-18	3.250	82.55	3.410	86.61	1.125	28.58	200	n/a	n/a
HVC-3375-18	3.375	85.73	3.535	89.79	1.125	28.58	250	n/a	n/a
HVC-3500-18	3.500	88.90	3.660	92.96	1.125	28.58	225	n/a	n/a
HVC-3500-24	3.500	88.90	3.660	92.96	1.500	38.10	200	n/a	n/a
HVC-3625-18	3.625	92.08	3.785	96.14	1.125	28.58	200	n/a	n/a
HVC-3750-18	3.750	92.25	3.910	99.31	1.125	28.58	200	n/a	n/a
HVC-3875-18	3.875	98.43	4.035	102.49	1.125	28.58	200	n/a	n/a
HVC-4000-20	4.000	101.60	4.160	105.66	1.250	31.75	100	n/a	n/a
HVC-4125-20	4.125	104.78	4.285	108.84	1.250	31.75	150	n/a	n/a
HVC-4187-20	4.187	106.35	4.347	110.41	1.250	31.75	100	n/a	n/a
HVC-4250-20	4.250	107.95	4.410	112.01	1.250	31.75	150	n/a	n/a
HVC-4375-20	4.375	111.13	4.535	115.19	1.250	31.75	150	n/a	n/a
HVC-4500-20	4.500	114.30	4.660	118.36	1.250	31.75	150	n/a	n/a
HVC-4750-20	4.750	120.65	4.910	124.71	1.250	31.75	100	n/a	n/a
HVC-5000-22	5.000	127.00	5.180	131.57	1.375	34.93	125	n/a	n/a
HVC-5187-22	5.187	131.75	5.367	136.32	1.375	34.93	125	n/a	n/a
HVC-5375-22	5.375	136.53	5.555	141.10	1.375	34.93	100	n/a	n/a
HVC-5500-22	5.500	139.70	5.680	144.27	1.375	34.93	100	n/a	n/a
HVC-5750-22	5.750	146.05	5.930	150.62	1.375	34.93	50	n/a	n/a
HVC-6000-24	6.000	152.40	6.180	156.97	1.500	38.10	90	n/a	n/a
HVC-6250-24	6.250	158.75	6.430	163.32	1.500	38.10	90	n/a	n/a
HVC-6500-24	6.500	165.10	6.680	169.67	1.500	38.10	80	n/a	n/a
HVC-6750-24	6.750	171.45	6.930	176.02	1.500	38.10	70	n/a	n/a
HVC-7000-24	7.000	177.80	7.180	182.37	1.500	38.10	50	n/a	n/a
HVC-7250-24	7.250	184.15	7.430	188.72	1.500	38.10	70	n/a	n/a
HVC-7500-24	7.500	190.50	7.680	195.07	1.500	38.10	50	n/a	n/a
HVC-7750-28	7.750	196.85	7.930	201.42	1.750	44.45	50	n/a	n/a
HVC-8000-28	8.000	203.20	8.180	207.77	1.750	44.45	50	n/a	n/a
HVC-8500-28	8.500	215.90	8.680	220.47	1.750	44.45	50	n/a	n/a
HVC-8750-28	8.750	222.25	8.930	226.82	1.750	44.45	50	n/a	n/a
HVC-9000-28	9.000	228.60	9.200	233.68	1.750	44.45	40	n/a	n/a
HVC-9250-28	9.250	234.95	9.450	240.03	1.750	44.45	40	n/a	n/a
HVC-9375-28	9.375	238.13	9.575	243.21	1.750	44.45	40	n/a	n/a
HVC-9500-28	9.500	241.30	9.700	246.38	1.750	44.45	40	n/a	n/a
HVC-9625-28	9.625	244.48	9.825	249.56	1.750	44.45	40	n/a	n/a
HVC-9875-28	9.875	250.83	10.075	255.91	1.750	44.45	40	n/a	n/a
HVC-10000-32	10.000	254.00	10.200	259.08	2.000	50.80	35	n/a	n/a
HVC-10312-32	10.312	261.92	10.512	267.00	2.000	50.80	25	n/a	n/a
HVC-10750-32	10.750	273.05	10.950	278.13	2.000	50.80	25	n/a	n/a
HVC-11000-32	11.000	279.40	11.200	284.48	2.000	50.80	25	n/a	n/a
HVC-11375-32	11.375	288.93	11.575	294.01	2.000	50.80	25	n/a	n/a
HVC-11750-32	11.750	298.45	11.950	303.53	2.000	50.80	25	n/a	n/a
HVC-12000-32	12.000	304.80	12.200	309.88	2.000	50.80	25	n/a	n/a
HVC-12250-32	12.250	311.15	12.450	316.23	2.000	50.80	25	n/a	n/a
HVC-12500-32	12.500	317.50	12.700	322.58	2.000	50.80	25	n/a	n/a
HVC-12625-32	12.625	320.68	12.825	325.76	2.000	50.80	25	n/a	n/a
HVC-12875-32	12.875	327.03	13.075	332.11	2.000	50.80	25	n/a	n/a
HVC-13250-32	13.250	336.55	13.470	342.14	2.000	50.80	25	n/a	n/a
HVC-13500-32	13.500	342.90	13.720	348.49	2.000	50.80	25	n/a	n/a
HVC-13600-32	13.600	345.44	13.820	351.03	2.000	50.80	25	n/a	n/a
HVC-14000-32	14.000	355.60	14.220	361.19	2.000	50.80	18	n/a	n/a
HVC-14250-32	14.250	361.95	14.470	367.54	2.000	50.80	25	n/a	n/a
HVC-14500-32	14.500	368.30	14.720	373.89	2.000	50.80	25	n/a	n/a
HVC-15000-32	15.000	381.00	15.220	386.59	2.000	50.80	25	n/a	n/a
HVC-15625-32	15.625	396.88	15.845	402.46	2.000	50.80	25	n/a	n/a
HVC-15875-32	15.875	403.23	16.115	409.32	2.000	50.80	25	n/a	n/a
HVC-16000-32	16.000	406.40	16.240	412.50	2.000	50.80	25	n/a	n/a
HVC-16500-32	16.500	419.10	16.740	425.20	2.000	50.80	20	n/a	n/a
HVC-17375-40	17.375	441.33	17.615	447.42	2.500	63.50	20	n/a	n/a
HVC-18000-40	18.000	457.20	18.240	463.30	2.500	63.50	15	n/a	n/a
HVC-19000-40	19.000	482.60	19.240	488.70	2.500	63.50	15	n/a	n/a
HVC-20000-40	20.000	508.00	20.240	514.10	2.500	63.50	15	n/a	n/a
HVC-21000-40	21.000	533.40	21.240	539.50	2.500	63.50	15	n/a	n/a
HVC-24000-48	24.000	609.60	24.240	615.70	3.000	76.20	15	n/a	n/a

† Mini and Micro Paks available in standard color.

‡ Minimum order for Micro Paks is 2.


HEZ Series (Flexible Caps with Pull-Tab for Easy Removal)



Series HEZ are temperature-resistant caps with a long tab centered at the top of the closure, which allows the cap to be manually removed easily, eliminating the use of tools which could damage threads or part surfaces. Flex500 is an innovative material specially formulated to withstand temperatures 500°F and beyond. HEZ caps are ideal for masking applications including powder coating, e-coating, painting and more.



Material: Flex500 Color*: Black Standard Option Color: Yellow

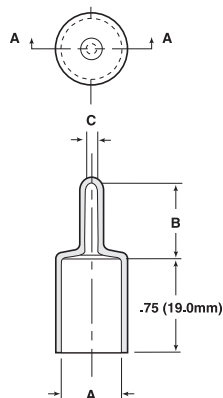

Caplug No.	Dimensions						Packaging		
	A		B		C		Carton Quantity	Mini Pak [†] Quantity	Micro Pak [‡] Quantity
	In	mm	In	mm	In	mm			
HEZ-187-12	.187	4.74	.500	12.70	.093	2.36	5000	n/a	n/a
HEZ-215-12	.215	5.46	.500	12.70	.093	2.36	5000	n/a	n/a
HEZ-240-12	.240	6.09	.625	15.87	.125	3.17	4000	800	50
HEZ-303-12	.303	7.69	.625	15.87	.125	3.17	4000	800	50
HEZ-365-12	.365	9.27	.625	15.87	.125	3.17	3500	700	50
HEZ-386-12	.386	9.80	.625	15.87	.125	3.17	4000	n/a	n/a
HEZ-406-12	.406	10.31	.625	15.87	.125	3.17	4000	n/a	n/a
HEZ-427-12	.427	10.84	.625	15.87	.125	3.17	3000	n/a	n/a
HEZ-460-12	.460	11.68	.500	12.70	.100	2.54	2500	n/a	n/a
HEZ-490-12	.490	12.44	.687	17.44	.125	3.17	2500	500	50
HEZ-521-12	.521	13.23	.625	15.88	.125	3.17	2500	n/a	n/a
HEZ-552-12	.552	14.02	.687	17.44	.125	3.17	2000	500	50
HEZ-600-12	.600	15.24	.812	20.62	.187	4.75	2000	n/a	n/a
HEZ-615-12	.615	15.62	.687	17.44	.125	3.17	2000	400	50
HEZ-655-12	.655	16.63	.875	22.22	.187	4.75	2000	n/a	n/a
HEZ-670-12	.670	17.02	.800	20.32	.190	4.83	2000	n/a	n/a
HEZ-677-12	.677	17.19	.812	20.62	.187	4.75	2000	n/a	n/a
HEZ-695-12	.695	17.65	.812	20.62	.187	4.75	1500	n/a	n/a
HEZ-735-12	.735	18.66	.812	20.62	.187	4.74	1500	300	25
HEZ-760-12	.760	19.30	.800	20.32	.190	4.83	2000	n/a	n/a
HEZ-797-12	.797	20.24	.812	20.62	.187	4.75	1500	n/a	n/a
HEZ-835-12	.835	21.20	.843	21.41	.187	4.74	1500	n/a	n/a
HEZ-860-12	.860	21.84	.843	21.41	.187	4.74	1500	300	25
HEZ-922-12	.922	23.41	.875	22.22	.187	4.74	1000	n/a	n/a
HEZ-985-12	.985	25.01	.875	22.22	.187	4.74	1000	250	25
HEZ-1048-12	1.048	27.53	1.000	25.40	.187	4.74	1000	n/a	n/a
HEZ-1110-12	1.110	28.19	1.125	28.58	.187	4.74	1000	n/a	n/a
HEZ-1175-12	1.175	29.85	.750	19.05	.325	8.26	1000	n/a	n/a
HEZ-1230-12	1.230	31.24	1.125	28.58	.187	4.74	900	n/a	n/a
HEZ-1355-12	1.355	34.41	1.125	28.58	.250	6.35	800	n/a	n/a
HEZ-1480-12	1.480	37.59	1.000	25.40	.250	6.35	800	n/a	n/a

† Mini and Micro Paks available in standard color.

‡ Minimum order for Micro Paks is 2.


HETV Series (Flexible External Thread Plugs)



Series HETV are temperature-resistant externally threaded plugs. These flexible plugs can be easily pushed in and removed with no threading required. External threads hold plugs securely in place. Flex500 is an innovative material specially formulated to withstand temperatures 500°F and beyond. HETV plugs are ideal for masking applications including powder coating, e-coating, painting and more.



Material: Flex500 Color*: Black Standard Option Color: Yellow



Caplug No.	Dimensions				Packaging	
	A		B		Carton Quantity	Mini Pak Quantity
	In	mm	In	mm		
HETV-4	.438	11.13	.438	11.13	7500	1000
HETV-5	.500	12.70	.500	12.70	7500	1000
HETV-6	.563	14.30	.500	12.70	6000	1000
HETV-8	.750	19.05	.625	15.88	5400	1000
HETV-10	.875	22.23	.688	17.48	4000	800
HETV-12	1.047	26.59	.750	19.05	2800	560
HETV-16	1.281	32.54	.875	22.23	2000	400

MASKING


HFC Series (Flexible Caps with Flat Pull-Tab for Easy Removal)



Series HFC are temperature-resistant caps with a long flat tab centered at the top of the closure, which allows for easy installation and removal. Flex500 is an innovative material specially formulated to withstand temperatures 500°F and beyond. HFC caps are ideal for masking applications including powder coating, e-coating, painting and more.



Material: Flex500 Color*: Black Standard Option Color: Yellow



Caplug No.	Dimensions								Packaging		
	A		B		C		D		Carton Quantity	Mini Pak [†] Quantity	Micro Pak [‡] Quantity
	In	mm	In	mm	In	mm	In	mm			
HFC-180-8	.180	4.57	.500	12.70	.500	12.70	.062	1.57	5000	n/a	n/a
HFC-180-16	.180	4.57	.500	12.70	1.000	25.40	.062	1.57	5000	1000	100
HFC-207-8	.207	5.25	.625	15.88	.500	12.70	.125	3.18	5000	n/a	n/a
HFC-207-16	.207	5.25	.625	15.88	1.000	25.40	.125	3.18	5000	n/a	n/a
HFC-240-8	.240	6.09	.625	15.88	.500	12.70	.125	3.18	5000	n/a	n/a
HFC-240-16	.240	6.09	.625	15.88	1.000	25.40	.125	3.18	5000	n/a	n/a
HFC-302-8	.302	7.67	.625	15.88	.500	12.70	.125	3.18	4000	n/a	n/a
HFC-302-16	.302	7.67	.625	15.88	1.000	25.40	.125	3.18	4000	n/a	n/a
HFC-365-8	.365	9.27	.625	15.88	.500	12.70	.125	3.18	5000	n/a	n/a
HFC-365-12	.365	9.27	.625	15.88	.750	19.05	.125	3.18	3000	n/a	n/a
HFC-365-16	.365	9.27	.625	15.88	1.000	25.40	.125	3.18	2500	n/a	n/a
HFC-396-8	.396	10.05	.625	15.88	.500	12.70	.125	3.18	3000	n/a	n/a
HFC-396-16	.396	10.05	.625	15.88	1.000	25.40	.125	3.18	3000	n/a	n/a
HFC-410-8	.410	10.41	.687	17.45	.500	12.70	.125	3.18	3000	n/a	n/a
HFC-410-16	.410	10.41	.687	17.45	1.000	25.40	.125	3.18	2000	400	50
HFC-427-8	.427	10.84	.625	15.88	.500	12.70	.125	3.18	3000	n/a	n/a
HFC-427-16	.427	10.84	.625	15.88	1.000	25.40	.125	3.18	2500	500	50
HFC-470-8	.470	11.93	.625	15.88	.500	12.70	.125	3.18	2000	n/a	n/a
HFC-470-16	.470	11.93	.625	15.88	1.000	25.40	.125	3.18	2000	n/a	n/a
HFC-490-8	.490	12.44	.625	15.88	.500	12.70	.125	3.18	2500	n/a	n/a
HFC-490-16	.490	12.44	.625	15.88	1.000	25.40	.125	3.18	1500	n/a	n/a
HFC-521-8	.521	13.23	.625	15.88	.500	12.70	.125	3.18	2000	n/a	n/a
HFC-521-16	.521	13.23	.625	15.88	1.000	25.40	.125	3.18	1500	300	50
HFC-552-8	.552	14.02	.687	17.45	.500	12.70	.125	3.18	3000	n/a	n/a
HFC-552-12	.552	14.02	.687	17.45	.750	19.05	.125	3.18	2000	n/a	n/a
HFC-552-16	.552	14.02	.687	17.45	1.000	25.40	.125	3.18	1500	n/a	n/a
HFC-590-8	.590	14.98	.625	15.88	.500	12.70	.125	3.18	1500	n/a	n/a
HFC-590-16	.590	14.98	.625	15.88	1.000	25.40	.125	3.18	1500	300	50
HFC-615-8	.615	15.62	.687	17.45	.500	12.70	.125	3.18	2000	n/a	n/a
HFC-615-16	.615	15.62	.687	17.45	1.000	25.40	.125	3.18	2000	n/a	n/a
HFC-677-8	.677	17.19	.687	17.45	.500	12.70	.125	3.18	1000	n/a	n/a
HFC-677-16	.677	17.19	.687	17.45	1.000	25.40	.125	3.18	1000	200	25
HFC-735-8	.735	18.66	.812	20.63	.500	12.70	.187	4.75	700	n/a	n/a
HFC-735-12	.735	18.66	.812	20.63	.750	19.05	.187	4.75	1250	n/a	n/a
HFC-735-16	.735	18.66	.812	20.63	1.000	25.40	.187	4.75	1000	n/a	n/a
HFC-797-8	.797	20.24	.812	20.63	.500	12.70	.187	4.75	900	n/a	n/a
HFC-797-16	.797	20.24	.812	20.63	1.000	25.40	.187	4.75	900	180	20
HFC-865-8	.865	21.97	.843	21.41	.500	12.70	.187	4.75	1000	n/a	n/a
HFC-865-16	.865	21.97	.843	21.41	1.000	25.40	.187	4.75	2500	n/a	n/a
HFC-990-8	.990	25.14	.875	22.23	.500	12.70	.187	4.75	600	n/a	n/a
HFC-990-16	.990	25.14	.875	22.23	1.000	25.40	.187	4.75	600	120	20
HFC-1230-16	1.230	31.24	1.125	28.58	1.000	25.40	.187	4.75	500	n/a	n/a
HFC-1230-24	1.230	31.24	1.125	28.58	1.500	38.10	.187	4.75	500	n/a	n/a
HFC-1605-16	1.605	40.76	1.250	31.75	1.000	25.40	.250	6.35	400	n/a	n/a
HFC-1605-24	1.605	40.76	1.250	31.75	1.500	38.10	.250	6.35	400	n/a	n/a

† Mini and Micro Paks available in standard color.

‡ Minimum order for Micro Paks is 2.


SRP Series (Silicone Rubber Plugs)



SRP Series Plugs have a tapered design for ease in plugging ports and holes in parts undergoing painting, plating, powder coating, anodizing, abrasive chemical processing, or exposure to high temperatures up to 600°F (316°C). Smaller sizes are solid while larger parts (Caplug No. with an H suffix) have a hollow design.



Material: Silicone Rubber Color*: Natural

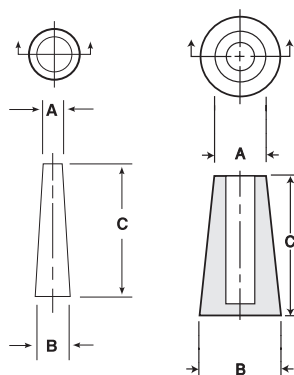

Caplug No.	Dimensions						Packaging	
	A		B		C		Carton Quantity	Mini Pak Quantity
	+/- .020 In	+/- .51 mm	+/- .010 In	+/- .25 mm	+/- .020 In	+/- .51 mm		
SRP-063-10	.016	.41	.062	1.89	.625	15.88	1000	200
SRP-078-16	.020	.51	.078	1.98	1.000	25.40	1000	200
SRP-100-10	.031	.79	.100	2.54	.625	15.88	1000	200
SRP-125-10	.062	1.89	.125	3.18	.625	15.88	1000	200
SRP-188-10	.062	1.89	.019	.57	.625	15.88	1000	200
SRP-250-12	.125	3.18	.250	6.35	.750	19.05	1000	200
SRP-344-10	.188	4.78	.344	8.74	.625	15.88	1000	100
SRP-375-12	.250	6.35	.375	9.53	.750	19.05	1000	100
SRP-438-16	.250	6.35	.438	11.13	1.000	25.40	1000	200
SRP-469-13	.344	8.74	.469	11.91	.813	20.65	400	80
SRP-500-32	.125	3.18	.500	12.70	2.000	50.80	200	40
SRP-594-16	.039	1.20	.590	17.98	1.000	25.40	400	80
SRP-687-16	.438	11.13	.687	17.45	1.000	25.40	200	25
SRP-750-16	.563	14.30	.750	19.05	1.000	25.40	100	20
SRP-781-16	.630	19.20	.787	23.99	1.000	25.40	100	20
SRP-938-16	.719	18.26	.938	23.83	1.000	25.40	100	20
SRP-1000-16	.787	19.99	1.024	26.01	1.000	25.40	100	20
SRP-1063-16	.905	22.99	1.063	27.00	1.000	25.40	100	20
SRP-1100-16	.938	23.83	1.100	27.94	1.000	25.40	100	20
SRP-1250-16	1.031	26.19	1.250	31.75	1.000	25.40	100	20
SRP-1438-16H	1.180	35.97	1.438	36.53	1.000	25.40	50	10
SRP-1531-16	1.250	31.75	1.531	38.89	1.000	25.40	100	20
SRP-1625-16H	1.313	33.35	1.625	41.28	1.000	25.40	50	n/a
SRP-1750-16H	1.457	44.41	1.772	54.01	1.000	25.40	50	n/a
SRP-1969-16H	1.625	49.53	1.969	50.01	1.000	25.40	25	n/a
SRP-2063-16	1.750	44.45	2.063	52.40	1.000	25.40	50	n/a
SRP-2203-16H	1.875	47.63	2.203	55.96	1.000	25.40	25	n/a
SRP-2469-16H	1.969	50.01	2.469	62.71	1.000	25.40	50	n/a
SRP-2500-16H	2.125	53.98	2.520	76.81	1.000	25.40	25	n/a
SRP-2688-16H	2.281	57.94	2.688	68.28	1.000	25.40	25	n/a


SPP Series (Silicone Rubber Pull Plugs)



SPP Series Pull Plugs are designed to provide complete and positive protection to female-threaded ports and to the inside walls of holes ranging from .09" diameter to .33" and in lengths from .62" to 1.00".




Material: Silicone Rubber Color*: Natural



Caplug No.	Dimensions						Packaging	
	A		B		C		Carton Quantity	Mini Pak Quantity
	+/- .020 In	+/- .51 mm	+/- .010 In	+/- .25 mm	+/- .020 In	+/- .51 mm		
SPP-091-10	.052	1.32	.091	2.31	.625	15.88	1000	200
SPP-109-16	.062	1.57	.109	2.77	1.000	25.40	1000	200
SPP-125-10	.062	1.57	.125	3.18	.625	15.88	500	100
SPP-130-10	.093	2.36	.130	3.30	.650	16.51	500	100
SPP-142-10	.085	2.16	.142	3.61	.625	15.88	500	100
SPP-156-10	.062	1.57	.156	3.96	.625	15.88	500	100
SPP-187-10	.110	2.79	.187	4.75	.620	15.75	500	100
SPP-197-16	.110	2.79	.197	5.00	1.000	25.40	500	100
SPP-225-16	.125	3.18	.225	5.71	1.000	25.40	500	100
SPP-257-16	.130	3.30	.257	6.53	1.000	25.40	500	100
SPP-275-15	.125	3.18	.275	6.99	.937	23.80	1000	200
SPP-312-20	.152	3.86	.312	7.92	1.250	31.75	200	40
SPP-335-16	.153	3.89	.335	8.51	1.000	25.40	200	40

MASKING

SWP Series (Silicone Washer Plugs)




SWP Series silicone washer plugs are designed for masking around a hole for grounding purposes or can be used as dual plugs. Made of silicone, the SWP Series is excellent for high-temperature applications up to 600°F (intermittent).



Material: Silicone Rubber **Color*:** Natural

Caplug No.	Dimensions						Packaging	
	A		B		C		Carton Quantity	Mini Pak Quantity
	In	mm	In	mm	In	mm		
SWP-130-250-140	.250	6.35	.130	3.30	.140	3.56	1000	200
SWP-140-250-180	.250	6.35	.140	3.56	.180	4.57	1000	200
SWP-130-312-150	.312	7.92	.130	3.30	.150	3.81	1000	200
SWP-140-312-180	.312	7.92	.140	3.56	.180	4.57	1000	200
SWP-155-312-230	.312	7.92	.155	3.94	.230	5.84	500	100
SWP-200-312-230	.312	7.92	.200	5.08	.230	5.84	500	100
SWP-130-375-150	.375	9.53	.130	3.30	.150	3.81	1000	200
SWP-140-375-200	.375	9.53	.140	3.56	.200	5.08	500	100
SWP-180-375-180	.375	9.53	.180	4.57	.180	4.57	500	100
SWP-238-375-250	.375	9.53	.238	6.05	.250	6.35	500	100
SWP-238-500-250	.500	12.70	.238	6.05	.250	6.35	250	50
SWP-275-500-375	.500	12.70	.275	6.99	.375	9.53	250	50

SFL Series (Silicone Flangeless Plugs)




SFL Series silicone flangeless plugs are designed to mask threaded holes without masking the surrounding area while undergoing painting, plating, powder coating, anodizing, abrasive chemical processing, or exposure to high temperatures. The tapered design allows for many different size holes to be masked using one size plug, and also offers a pull-tab for easy removal. The SFL Series is available in an assortment of colors for easy identification.



Material: Silicone Rubber **Color*:** See chart

Caplug No.	Color	Dimensions						Packaging	
		A		B		C		Carton Quantity	Mini Pak Quantity
		In	mm	In	mm	In	mm		
SFL-157-236	Natural	.157	3.99	.236	5.99	1.00	25.40	1000	200
SFL-236-315	Gray	.236	5.99	.315	8.00	1.00	25.40	1000	200
SFL-315-394	Yellow	.315	8.00	.394	10.01	1.00	25.40	1000	200
SFL-394-472	Blue	.394	10.01	.472	11.99	1.00	25.40	500	100
SFL-472-551	Natural	.472	11.99	.551	14.00	1.00	25.40	500	100
SFL-551-630	Gray	.551	14.00	.630	16.00	1.00	25.40	200	40
SFL-630-709	Rust	.630	16.00	.709	18.01	1.00	25.40	200	40
SFL-709-787	Blue	.709	18.01	.787	19.99	1.00	25.40	200	40
SFL-787-886	Natural	.787	18.97	.846	21.49	1.00	25.40	200	40
SFL-886-945	Gray	.886	22.50	.945	24.00	1.00	25.40	200	40
SFL-945-1024	Rust	.945	24.00	1.024	26.01	1.00	25.40	100	20
SFL-1024-1102	Blue	1.024	26.01	1.102	27.99	1.00	25.40	100	20
SFL-1102-1125	Green	1.102	27.99	1.125	28.58	1.00	25.40	100	20
SFL-1125-1250	Green	1.125	28.58	1.250	31.75	1.00	25.40	100	20

HTP Series (Flexible Tapered Plugs)



Series HTP are temperature-resistant plugs designed with a distinct tapered configuration making them ideal for plugging small holes ranging in diameter from .070" to .343". Flex500 is an innovative material specially formulated to withstand temperatures 500°F and beyond. HTP plugs are ideal for masking applications including powder coating, e-coating, painting and more.





Material: Flex500 Color*: Black Standard Option Color: Yellow

Caplug No.	Dimensions						Packaging		
	A		B		C		Carton Quantity	Mini Pak [†] Quantity	Micro Pak [‡] Quantity
	In	mm	In	mm	In	mm			
HTP-4	.15	3.81	.07	1.78	.625	15.88	5000	1000	50
HTP-6	.20	5.08	.10	2.54	.500	12.70	5000	1000	50
HTP-8	.25	6.35	.14	3.56	.750	19.05	5000	1000	50
HTP-9	.30	7.62	.14	3.56	1.000	25.40	5000	1000	50
HTP-10	.31	7.87	.16	4.06	.750	19.05	5000	1000	50
HTP-11	.31	7.87	.19	4.83	1.000	25.40	5000	1000	50
HTP-12	.34	8.64	.19	4.83	.750	19.05	5000	1000	50

[†] Mini and Micro Paks available in standard color.

[‡] Minimum order for Micro Paks is 2.

HVTP Series (Flexible Tapered Plugs)

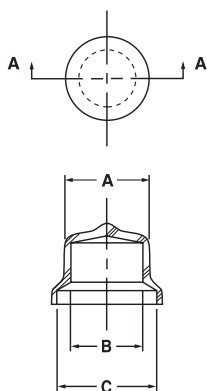

Series HVTP are temperature-resistant plugs that provide a snug fit when pushed into open parts, ensuring a tight closure that will not pop out accidentally during masking processes. A simple tug on the flanged lip of an installed HVTP breaks the seal for easy removal. Flex500 is an innovative material specially formulated to withstand temperatures 500°F and beyond. HVTP plugs are ideal for masking applications including powder coating, e-coating, painting and more.



Material: Flex500 Color*: Black Standard Option Color: Yellow


Caplug No.	Dimensions								Packaging		
	To Plug Thread Size		A		B		C		Carton Quantity	Mini Pak [†] Quantity	Micro Pak [‡] Quantity
	NPT	STD	In	mm	In	mm	In	mm			
HVTP-05	-	1/4	.195	4.95	.125	3.18	.300	7.62	5000	1000	100
HVTP-1	-	5/16	.290	7.37	.210	5.33	.406	10.31	5000	1000	100
HVTP-2	1/8	3/8	.400	10.16	.290	7.37	.437	11.10	5000	1000	100
HVTP-25	-	7/16	.445	11.30	.340	8.64	.500	12.70	5000	1000	100
HVTP-3	1/4	1/2	.530	13.46	.365	9.27	.555	14.10	5000	1000	100
HVTP-35	-	9/16	.570	14.48	.445	11.30	.625	15.88	2500	500	50
HVTP-4	3/8	5/8	.640	16.26	.520	13.21	.750	19.05	2500	500	50
HVTP-5	1/2	3/4	.800	20.32	.682	17.32	.937	23.80	2500	500	50
HVTP-55	3/4	7/8	.870	22.10	.732	18.59	1.000	25.40	1000	200	25
HVTP-6	3/4	1-1/16	1.025	26.04	.891	22.63	1.188	30.18	1000	200	25
HVTP-7	1	1-3/16, 1-1/4, 1-5/16	1.275	32.39	1.147	29.13	1.453	36.91	1000	200	25

[†] Mini and Micro Paks available in standard color.

[‡] Minimum order for Micro Paks is 2.

MASKING

MTG, MTB, MTK Series (Polyester and Polyimide Masking Tape for Powder Coating)




Caplugs High-Temperature Masking Tapes are ideal for masking applications during powder coating, plating and finishing. Series MTG is a 2-Mil polyester film backing with a 1.5-Mil silicone adhesive that offers superior resiliency at intermittent temperatures up to 400°F (204°C). Series MTB is a thinner (1.0-Mil polyester film/ 2.0-Mil adhesive) version of MTG, is stocked in a blue color and is ideal for masking curved surfaces. Series MTK with a Kapton® polyimide film backing will withstand intermittent temperatures up to 500°F (260°C).



Caplug No.	Dimensions				Packaging	
	Roll Width [A]		Length per Roll		No. of Rolls	Mini Pak Quantity
	In	mm	yards	meters		
MTG Green Masking Tape						
MTG 1/2 -72	.50	12.70	72	65.84	6	n/a
MTG 3/4-72	.75	19.05	72	65.84	4	n/a
MTG 1-72	1.00	25.40	72	65.84	5	n/a
MTG 1 1/2 -72	1.50	38.10	72	65.84	5	n/a
MTG 2-72	2.00	50.80	72	65.84	5	n/a
MTG-2 3/4-72	2.75	69.85	72	65.84	4	n/a
MTG-4-72	4.00	101.60	72	65.84	4	n/a
MTB Blue Masking Tape						
MTB 1/2-72	.50	12.70	72	65.84	6	n/a
MTB 1-72	1.00	25.40	72	65.84	4	n/a
MTB 1 1/2-72	1.50	38.10	72	65.84	5	n/a
MTB 2-72	2.00	50.80	72	65.84	5	n/a
MTK Gold Kapton® Masking Tape						
MTK 1/2-36	.50	12.70	36	32.92	6	n/a
MTK 1-36	1.00	25.40	36	32.92	4	n/a

MTG Green Masking Tape			MTB Blue Masking Tape			MTK Gold Kapton® Masking Tape		
Material:	Backing	Adhesive	Material:	Backing	Adhesive	Material:	Backing	Adhesive
Thickness:	Polyester	Silicone	Thickness:	Polyester	Silicone	Thickness:	Polyimide	Silicone
Color:	2.0 Mil	1.5 Mil	Color:	1.0 Mil	2.0 Mil	Color:	1.0 Mil	1.6 Mil
Temperature:	Green	Clear	Temperature:	Blue	Clear	Temperature:	Gold	Clear
	400°F (204°C)			400°F (204°C)			500°F (260°C)	

MTS Series (Silicone Masking Tape for Powder Coating)




Series MTS Masking Tape is a silicone rubber masking tape which bonds to itself, making it ideal for applications where dust-collecting adhesive residues are undesirable. In addition to withstanding intermittent temperatures up to 500°F (260°C), it is an excellent electrical insulator.

Material: Silicone **Color*:** Red **Thickness:** 20 Mil **Temperature:** 500°F (260°C)



Caplug No.	Dimensions				Packaging	
	Roll Width [A]		Length per Roll		No. of Rolls	Mini Pak Quantity
	In	mm	yards	meters		
MTS 1-12	1.00	25.40	12	10.97	1	n/a

MDG, MDK Series Polyester and Polyimide Masking Discs for Powder Coating



Caplugs Masking Discs are available from stock in two styles: Series MDG, a 2-Mil polyester film backing with a 1.5-Mil silicone adhesive that offers superior resiliency at intermittent temperatures up to 400°F (204°C); and Series MDK, which has a Kapton® polyimide film backing that will withstand intermittent temperatures up to 500°F (260°C). Caplugs Masking Discs have broad applications in powder coating, electroplating, chrome plating, anodizing and solder wave applications.



Caplug No.	Dimensions		Packaging		
	Disc Diameter [A]		Discs per Roll	No. of Rolls	Mini Pak Quantity
	In	mm			
MDG Green Masking Disc					
MDG 1/4-2000	.25	6.35	2000	1	n/a
MDG 3/8-2000	.38	9.65	2000	1	n/a
MDG 1/2-2000	.50	12.70	2000	1	n/a
MDG 3/4-1000	.75	19.05	1000	1	n/a
MDG 1-500	1.00	25.40	500	1	n/a
MDK Gold Kapton® Masking Disc					
MDK 1/4-2000	.25	6.35	2000	1	n/a
MDK 3/8-2000	.38	9.65	2000	1	n/a
MDK 1/2-2000	.50	12.70	2000	1	n/a
MDK 3/4-1000	.75	19.05	1000	1	n/a
MDK 1-500	1.00	25.40	500	1	n/a

<i>MDG Green Masking Disc</i>			<i>MDK Gold Kapton® Masking Disc</i>		
	Backing	Adhesive		Backing	Adhesive
Material:	Polyester	Silicone	Material:	Polyimide	Silicone
Thickness:	2.0 Mil	1.5 Mil	Thickness:	1.5 Mil	2.0 Mil
Color:	Green	Clear	Color:	Gold	Clear
Temperature:	400°F (204°C)		Temperature:	600°F (315°C)	